

ROOF DATA

PITCH	4/12
OVERHANG	1-10-8
PLATE TO PEAK HEIGHT	5-10-0
ROOFING MATERIAL	Shingle
SOFFIT DROP	0-1-3

LOADING TABLE

LIMIT STATES DESIGN


G.S.L.	52.2
R.L.	6.3
T.C.L.L.	35.0
T.C.D.L.	8.0
B.C.L.L.	0.0
B.C.D.L.	7.0
TOTAL LOAD	50.0



LINEAR ITEMS

Eave Line : 118.98 Ft.
Gable Line : 118.89 Ft.
Ridge Line : 68.88 Ft.
Hip Line : 0 Ft.
Valley Line : 0 Ft.
Wallplate :
Batten :

Roof Area = 2287.72 Sqft.

GENERAL NOTES

TRUSSES ARE 24" O/C U.N.O.
 ALL POINT LOADS ARE TOTAL UNFACTORED
TRUSS LEFT END MARKED WITH 
 SEE ENGINEERED DRAWINGS FOR THE CORRECT INSTALLATION DIRECTION.
 SEE TRUSS PACKAGE FOR CORNER INSTALLATION DETAILS. DUAL PITCH CORNERS MAY NOT CONTACT CORNER OF WALL(S)
 THE GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS IN WRITING, AND BE RESPONSIBLE FOR REPORTING ANY DISCREPANCIES TO THE MANUFACTURER PRIOR TO FABRICATION
 APPROVAL OF THE SHOP DRAWINGS MEANS THE CONFIGURATION, BEARING LOCATIONS AND DESIGN CRITERIA HAVE BEEN REVIEWED AND APPROVED. AS CONTRACTOR YOU MUST VERIFY AND APPROVE ALL DIMENSIONS AND TRUSS COUNTS ON THE LAYOUT. TRUSSES WILL BE MANUFACTURED AS APPROVED

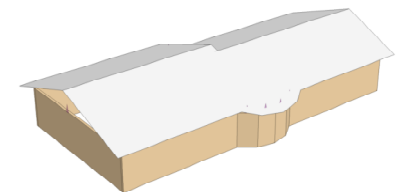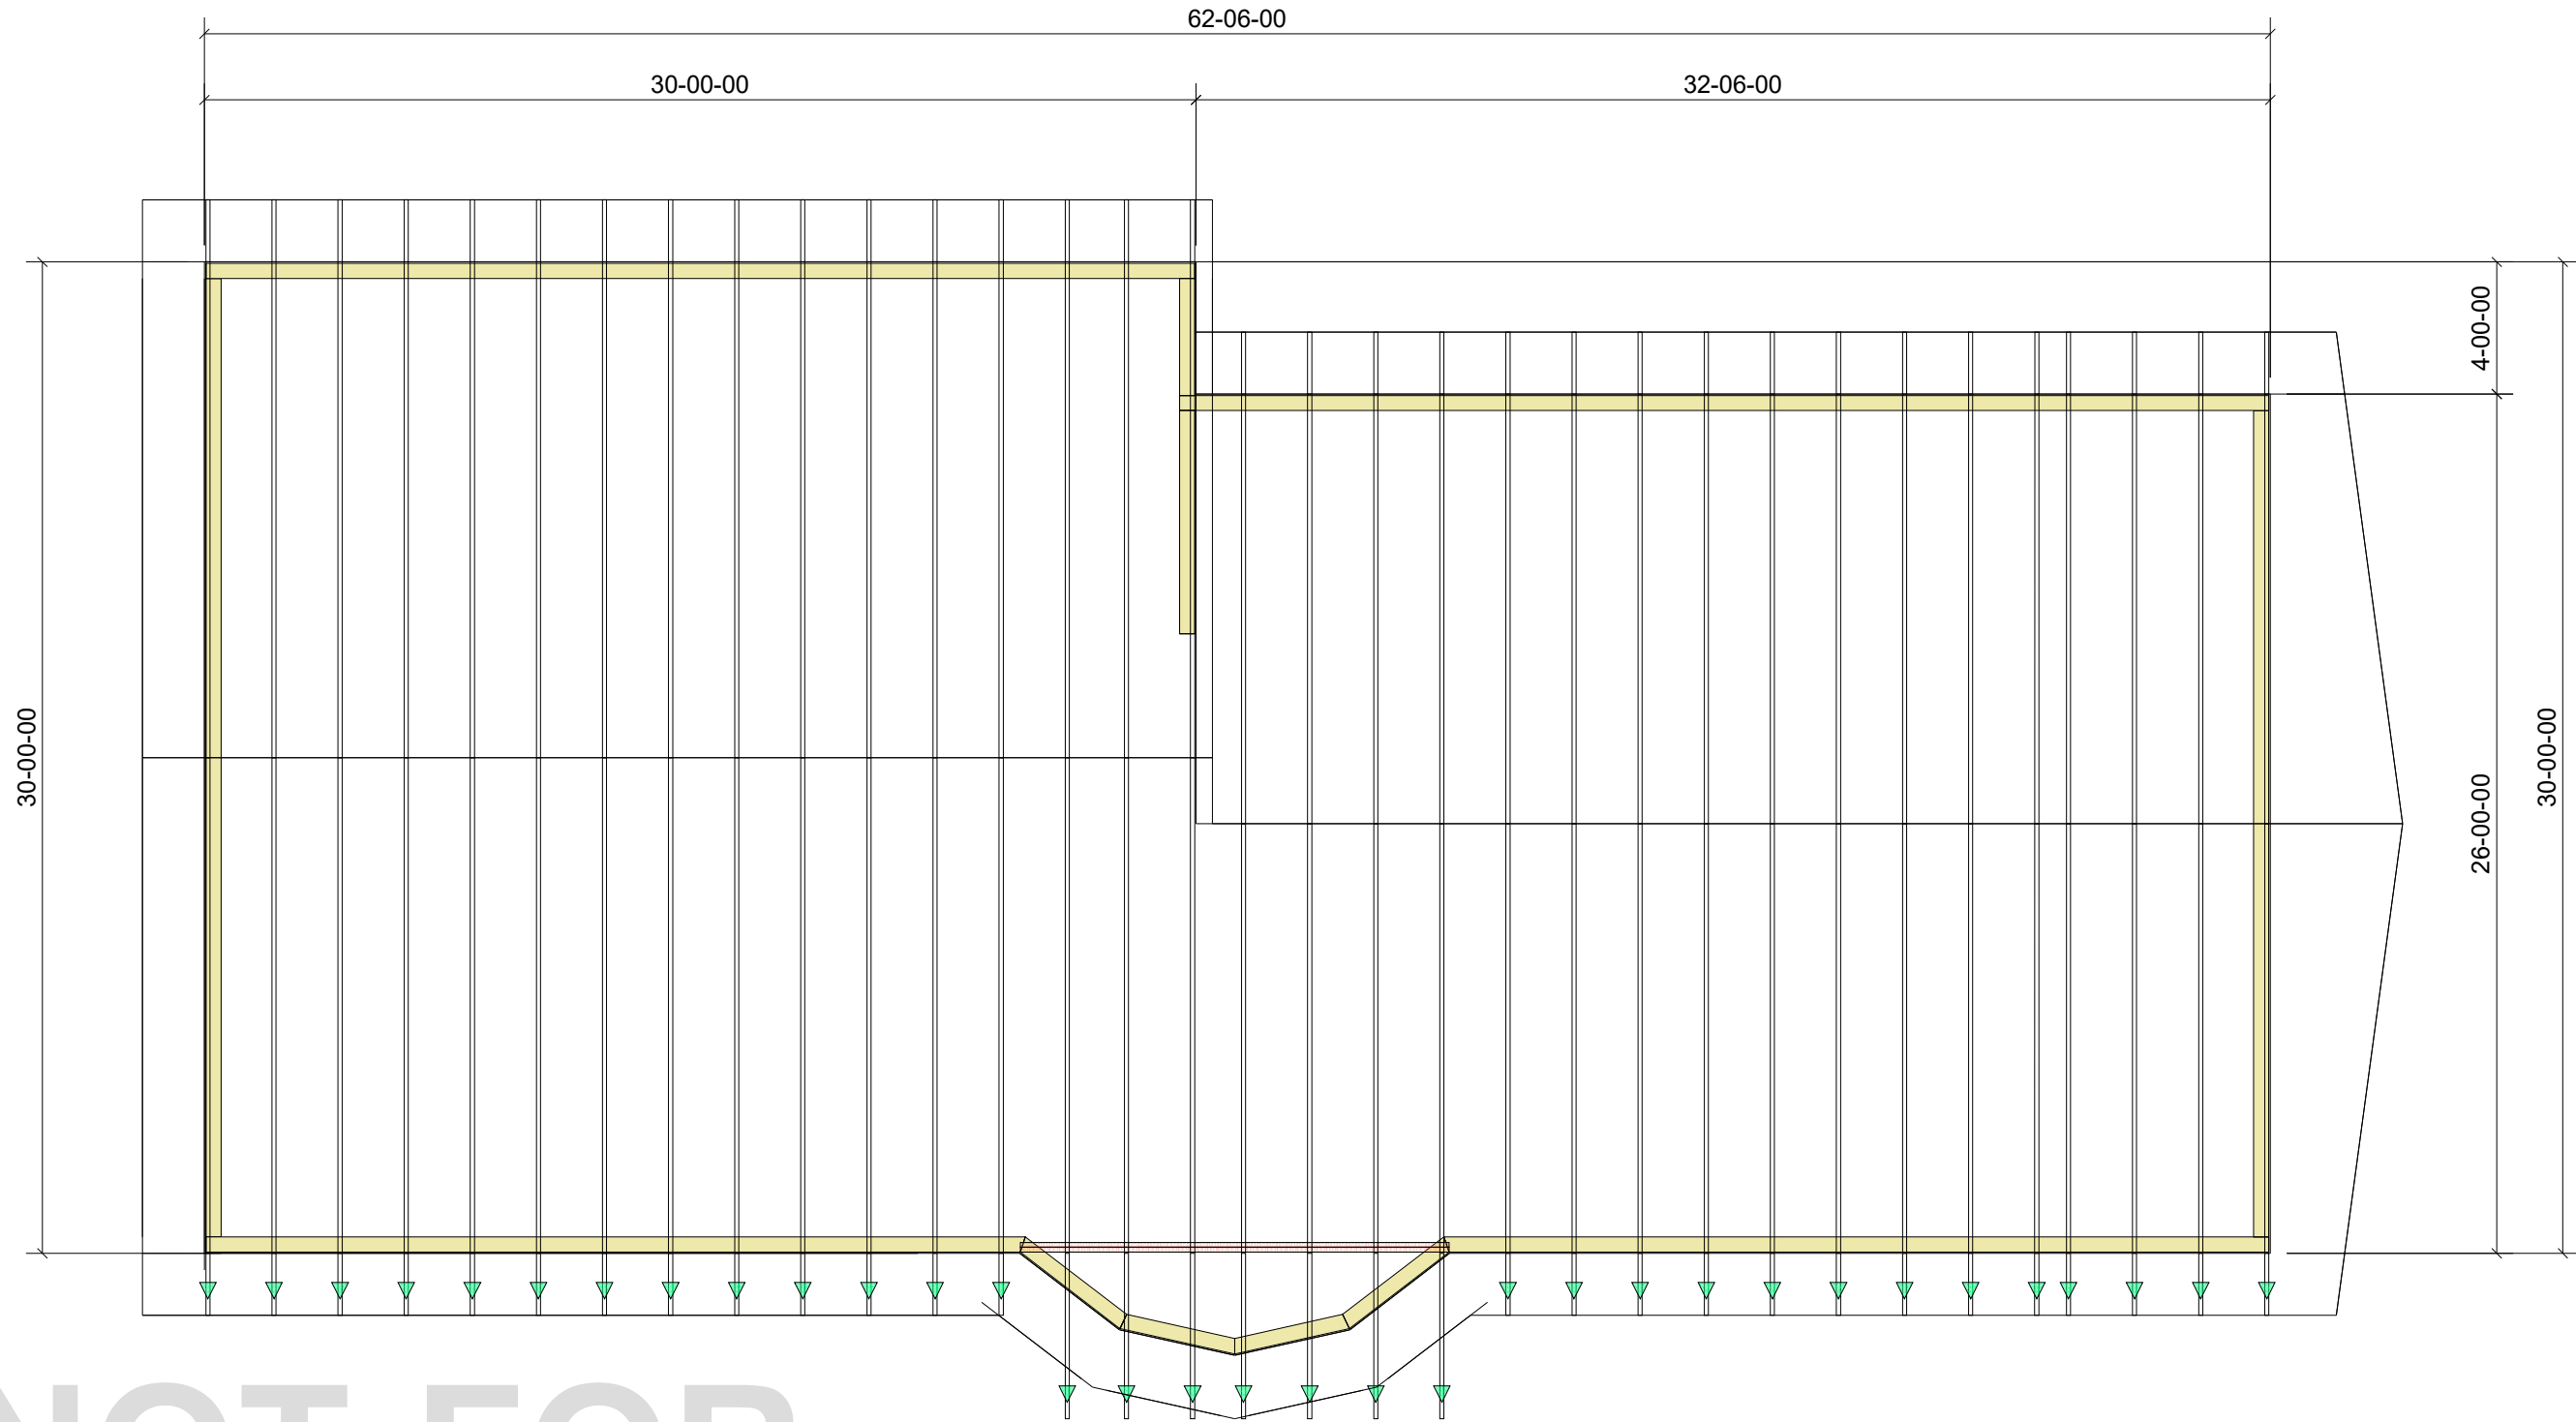

NOT FOR CONSTRUCTION